


STATSHIELD® METAL-OUT SHIELDING SERIES

Meets EN 61340-5-1 and Packaging standard IEC 61340-5-3 tested per IEC 61340-2-3 (ANSI/ESD STM11.11) and IEC 61340-4-8 (ANSI/ESD STM11.31)

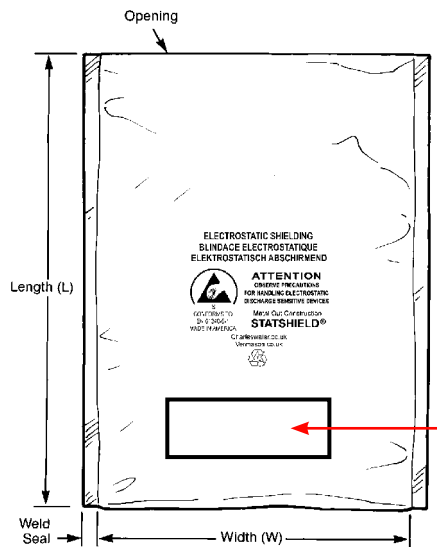

Date & Lot Code
Printed for QC
Traceability


Side Weld Seals 9.5mm (± 2.5mm)
Tolerance W: ± 6mm / Tolerance L: ± 6mm

High Performance Static
Dissipative Abrasion
Resistant Coating

Aluminium
Shielding
Layer

Low Charging Static
Dissipative Proprietary
Polyester Layer

Low Charging Static
Dissipative Proprietary
Inner Polyethylene



Mixed Unsortable Plastic Scrap

Mixed unsortable plastic scrap shall contain assorted plastics of multiple grades that are co-extruded, bonded or laminated together which are unsortable into individual grades.

Desco Europe bags are recyclable

Statshield® bags are packaged 100 per package in an oversized shielding bag.
See **Shielding Bag Storage** at [TB-7057](#).

Specifications:

Electrical Properties

Surface Resistance:

Outer Surface

Inner Surface

Discharge Shielding

Charge Generation

Typical Values

1 x 10⁴ to < 1 x 10⁸ ohms

1 x 10⁴ to < 1 x 10¹¹ ohms

<20 nJ

Teflon: -0.03 nC/sq. in.

Quartz: +0.10 nC/sq. in.

<30 volts

Test Procedures/Method

IEC 61340-2-3

IEC 61340-2-3

IEC 61340-4-8

Modified Incline Plane

Modified Incline Plane

EIA 541

Capacitance Probe (to dissipate 1 KV)

Physical Properties:

Film Thickness

Width (Inside Dimensions)

Length (Inside Dimensions)

Light Transmission

Tensile Strength

Puncture Resistance

Heat Seal

Cleanliness

Marking Adhesion

Nominal 0.0762mm ±10%

Nominal -0" / + 3.2mm

Nominal ± 3.2mm

40% (Tobias)

4600 PSI, 32 MPa

>10 lbs

>10 lbs/in.

Silicone Not detected

Pass

MIL-STD-3010, 1003

ASTM D-1003

ASTM 882

MIL-STD-3010, 2065

375°F, 1/2 sec 60 psi

ASTM E168

IPC-TM-650 2.4.1

Chemical Properties

Corrosion

No effect on aluminium, copper, silver, Sn-Pb coated foil, stainless steel, low carbon steel

Polycarbonate Capability

Yes

Bag is free of amines, N-octanoic acid, silicones and heavy metals.

Packaging Standard EN 61340-5-3 clause 5.3 Outside an EPA

"Transportation of sensitive products outside of an EPA shall require packaging that provides both:

- dissipative or conductive materials for intimate contact;
- a structure that provides electrostatic discharge shielding"

NOTE 1: If electrostatic field shielding materials are used to provide discharge shielding, a material that provides a barrier to current flow should be used in combination with the electrostatic field shielding material.

NOTE 2: Dissipative materials are preferred for intimate packaging in situations where charged device model (CDM) damage is a concern."

RoHS 2, REACH and Conflict Minerals Statement

None of the RoHS 2 restricted materials, or REACH substances of very high concern as of 2015/12/17, or Conflict Minerals are intentionally added in manufacturing this product. Ref: European Directive 2011/65/EC Article 4.1. and Regulation (EC) No. 1907/2006/CE. See Desco Europe Limited Warranty at [DescoEurope.com](#).



Made in the
United States of America

Statshield® and Statfree® are Registered Trademarks of Desco Industries, Inc.

Specifications and procedures subject to change without notice.

DESCO EUROPE

STATSHIELD® BAG, SHIELDING, METAL-OUT CONSTRUCTION

DESCO EUROPE
2A DUNHAMS LANE, LETCHWORTH GARDEN CITY,
HERTFORDSHIRE, SG6 1BE, UK
PHONE: +44 (0) 1462 672005

E-MAIL: Service@DescoEurope.com, INTERNET: DescoEurope.com

Drawing Number
202100

DATE:
July
2017