



- A. This Desco Europe PCB rack is moulded from a carbon black-filled polypropylene compound.
- B. These racks are designed to protect CMOS loaded boards in storage.
- C. Recommended maximum operating temperature is 85°C.
- D. Open carrying handles.
- E. Measurements: 175mm x 500mm.
- F. Weight: 0.7kg.
- G. 20 slots with easy-to-load angle: 3mm x 8mm on a 18.75mm pitch.
- H. Recyclable

*"Tools intended for use within the EPA [ESD protected area] shall, as far as is practicable, be so constructed that they do not generate or hold an electrostatic charge ....All tools and machinery, for example electrical, mechanical or pneumatic, shall be so constructed that any non-insulating part of the tool or machine which may touch an ESDS [ESD sensitive items] shall be at EPA ground potential."*  
 [EN 61340-5-1 clause 5.2.10 Tools, machinery, dispensers and test equipment]

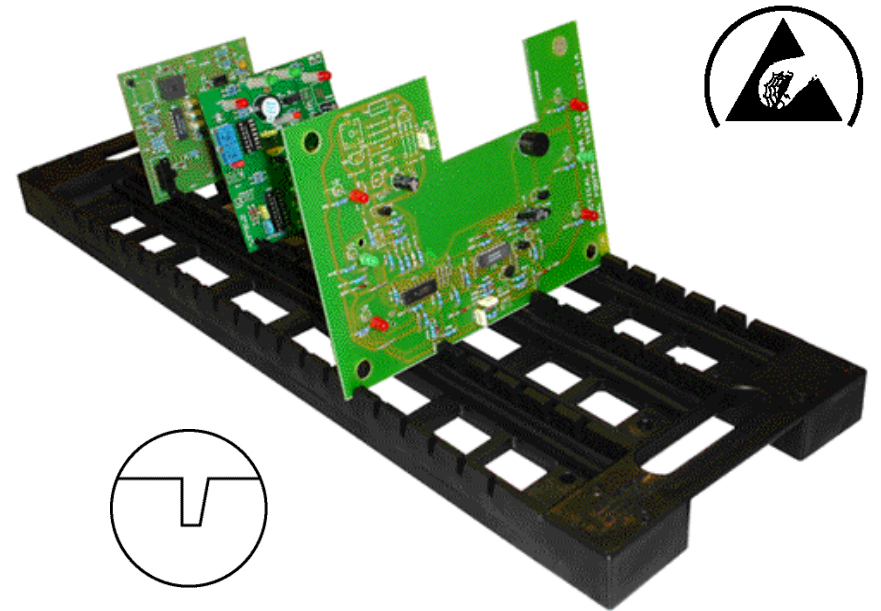

Properties		Unit	Test Method
Electrical Properties			
Surface Resistance	<10 <sup>6</sup>	Ohms/square	ASTM D-257
Volume Resistance	<10 <sup>6</sup>	Ohms-cm	ASTM D-257
Mechanical Properties			
Tensile Strength @ Break	2860 (19.7)	psi (MPa)	ASTM D-638
Tensile Elongation @ Break	2.5	%	ASTM D-638

ITEM	DESCRIPTION
<a href="#">237215</a>	Conductive PCB Rack, 175mm x 500mm

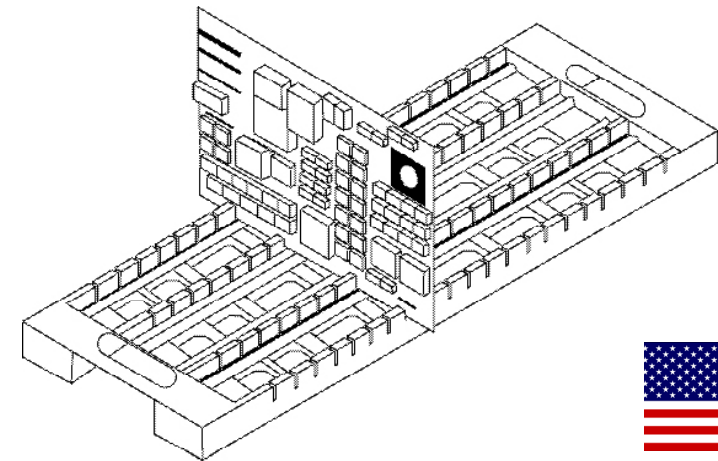

Made in the United States of America

Unless otherwise noted, tolerance ±10%  
 Specifications and procedures subject to change without notice.

### Conductive PCB Rack, 175mm x 500mm

# DESCO EUROPE

DESCO EUROPE  
 2A DUNHAMS LANE, LETCHWORTH GARDEN CITY,  
 HERTFORDSHIRE, SG6 1BE, UK  
 PHONE: +44 (0) 1462 672005  
 E-MAIL: [Service@DescoEurope.com](mailto:Service@DescoEurope.com), INTERNET: [DescoEurope.com](http://DescoEurope.com)

**Drawing Number**  
 237215

**DATE:**  
 December  
 2017