




Made in America

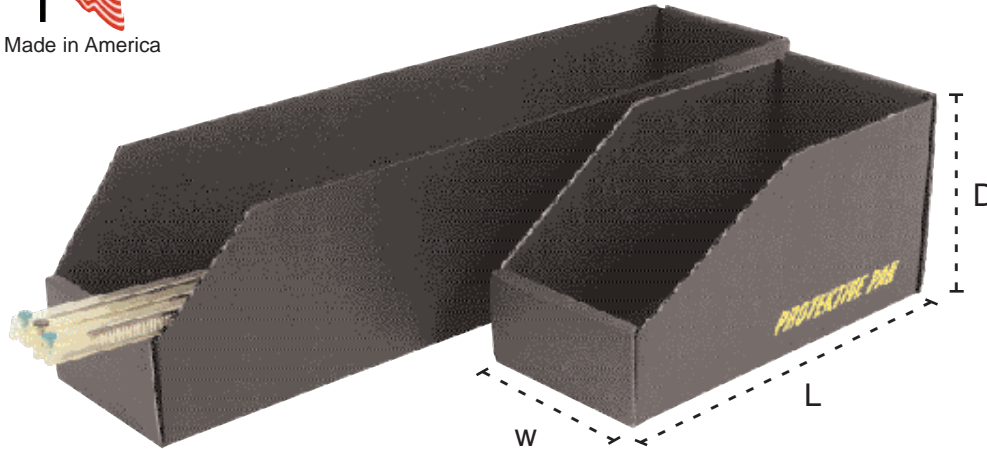

Features

- Economical method of storing static sensitive electronics devices
- Wide choice of sizes
- Shipped knocked-down; easy to assemble
- Made in America



Item No.	Size O.D. - L x W x D
37100	146 X 95 X 68 mm
37101	229 X 102 X 114 mm
37102	305 X 51 X 114 mm
37103	305 X 102 X 114 mm
37104	305 X 152 X 114 mm
37105	305 X 203 X 114 mm
37106	305 X 305 X 114 mm
37115	457 X 102 X 114 mm
37107	457 X 102 X 114 mm

Item No.	Size O.D. - L x W x D
37108	457 X 152 X 114 mm
37109	457 X 203 X 114 mm
37110	457 X 305 X 114 mm
37117	610 X 305 X 162 mm
37116	629 X 57 X 114 mm
37111	629 X 108 X 114 mm
37112	629 X 159 X 114 mm
37113	629 X 210 X 114 mm
37114	629 X 305 X 114 mm

SPECIFICATIONS

Properties

Electrostatic Decay
Surface Resistance

Surface Resistance, Low R.H. Cut-off

High-Voltage Discharge Resistance

Static Shielding

Charged Device Model (CDM) Safety

Current-Carrying Hazard

Corrosivity

Antistat Transfer

Water & Isopropyl Alcohol Extraction
Tests for Antistat Permanence

Sloughing Test

Recyclability

Biodegradability

Volume Conductivity

Shelf Life

Typical Values

0.01 seconds at 72°F and 11.8% R.H.

10E6 - 10E8 ohms/sq. after 11 days at 68°F and 12% R.H. for surface. 10E3 - 10E4 ohms/sq. for buried shielding layer

4% R.H.

Failure rate 0/5 (no oxide damage in five consecutive tests)

99.9% attenuation at 10kV; 99.6% attenuation at 30kV

RTG >10E7 ohms at 86% R.H. or less

10E3 mA at 110V; 10E3 mA at 220V

Contains 1-3 ppm reducible sulfur

No transfer

Surface resistance 10E8 - 10E9 ohms/square at 74°F and 36% R.H.

Negligible surface damage at 10 cycles and <5% of surface damage at 200 cycles in Taber Abrasion Test. No conductive particles abraded from surface

Complete recyclability of package

Biodegradation in or on moist soil

Conductivity from wall to wall as well as across surface to assure permanence of the antistatic property

Indefinite

Test Procedures/Method

FED-STD-101, Method 4046

ASTM D257

Rockwell International Test Report of December 20, 1991

Rockwell International Test Report of December 20, 1991

EIA 541, appendix E, capacitive probe test

Rockwell International Test Report of December 20, 1991

ESD from A to Z

FED-STD-101, Method 3005 for reducible sulfur

Rockwell International Test Report of January 8, 1992

Rockwell International Test Report of January 8, 1992

ASTM D4060 at 70 rpm with CS-17 abrasive-coated wheels and 1000 grams load

Rockwell International Test Report of January 8, 1992

Rockwell International Test Report of January 8, 1992

Rockwell International Test Report of January 8, 1992

OPEN BIN BOXES

PROTEKTIVE PAK

PROTEKTIVE PAK
 13520 MONTE VISTA AVENUE, CHINO, CA 91710
 PHONE (909) 627-2578, FAX (909) 363-7331
 ProtektivePak.com

DRAWING NUMBER
 37100.E

DATE:
 11/06