




Features

- Basic Protektive Pak tray
- Great container for Kanban
- Static dissipative foam bottom provides ESD and shock protection

Foam Electrical Properties: 1×10^5 to $< 1 \times 10^9$ ohms

Foam Thickness: 1/4"

Item No.	Size I.D. - L x W x D (IN)
37650	17-3/4 x 10-3/4 x 2-1/8
37651	17-7/8 x 13-5/8 x 2-1/8
37653	19-1/4 x 13-1/8 x 2-1/8
37654	19-3/8 x 15-3/4 x 2-1/8
37652	24 x 13-1/2 x 2-1/8

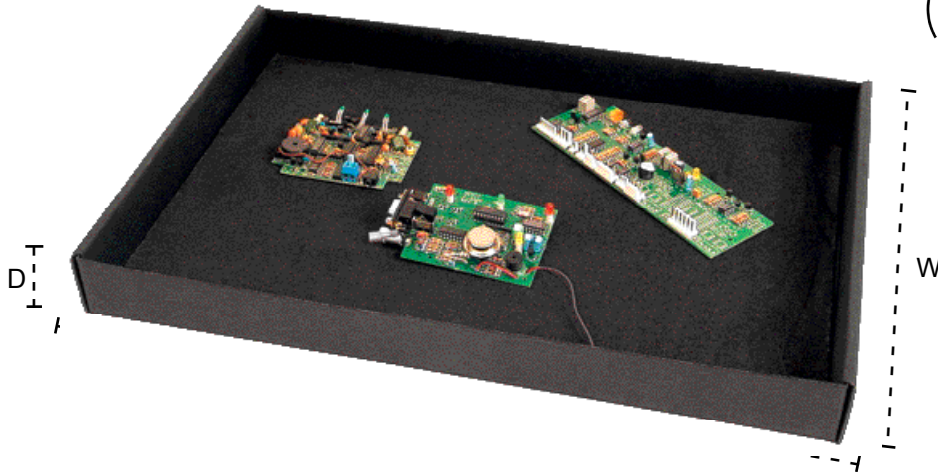

Meets the required limits of ANSI/ESD S20.20, Packaging standard ANSI/ESD S541, and worksurface standard ANSI/ESD S4.1

SPECIFICATIONS

Properties

Surface Resistance

Sloughing Test

Recyclability

Typical Values

1×10^6 to $< 1 \times 10^9$ ohms

Negligible surface damage at 10 cycles and <5% of surface damage at 200 cycles in Taber Abrasion Test.

No conductive particles abraded from surface

Complete recyclability of package

Test Procedures/Method

ANSI/ESD S4.1 and ESD TR53

ASTM D4060 at 70 rpm with CS-17 abrasive-coated wheels and 1000 grams load

Rockwell International Test Report of January 8, 1992

Rockwell International Test Report of January 8, 1992

RoHS 2, REACH, and Conflict Minerals Statement

None of the RoHS 2 restricted materials, or REACH substances of very high concern as of 2014/12/17, or Conflict Minerals are intentionally added in manufacturing this product. Ref: European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE. See Protektive Pak [terms and conditions](#).



Made in the
United States of America

Specifications and procedures subject to change without notice.

BOARD HANDLER TRAYS

PROTEKTIVE PAK

13520 MONTE VISTA AVENUE, CHINO, CA 91710
PHONE (909) 627-2578, FAX (909) 363-7331

ProtektivePak.com

DRAWING NUMBER

37650

DATE:

October
2015

Unless otherwise noted, tolerance is $\pm 10\%$

PROTEKTIVE PAK
BURIED SHIELDING LAYER