




## DISSIPATIVE PINK POLY

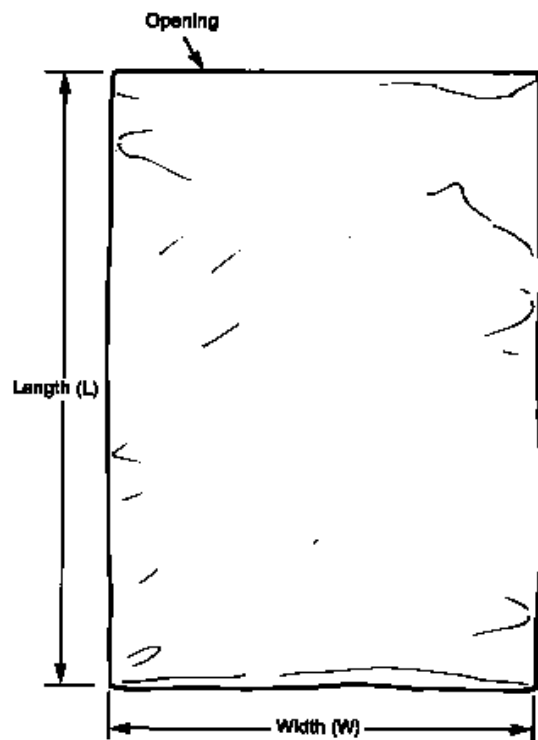

### Specifications:

#### Electrical Properties

Static Decay  
 Surface Resistance  
 Polycarbonate Haze  
 Corrosivity Observations

#### Typical Values

<1.0 sec.  
 < 10<sup>11</sup> Ohms  
 NE  
 NE

#### Test Procedures/Method

ASTM 101 Method 4046  
 ESD S11.11  
 72 hr contact  
 FTMS 101C Method 3005

#### Physical Properties


Thickness  
 Melt Index  
 Density  
 Dart Impact  
 Coefficient of Friction  
 1% Secant Modulus (Stiffness)

4 mils  
 0.050 gm/10 min  
 0.923 gm/cc  
 230 gms  
 MD 24,000 psi  
 MD 25,000 psi

ASTM D-1238  
 ASTM D-1505  
 ASTM D-1709  
 ASTM D-1894 (unmodified film)  
 ASTM D-882

Item No.	Size (MM) W x L	Item No.	Size (MM) W x L
49100	51 X 76	49110	203 X 305
49101	76 X 102	49111	254 X 305
49102	76 X 127	49112	254 X 356
49103	102 X 152	49113	254 X 508
49104	127 X 178	49114	305 X 406
49105	127 X 203	49115	356 X 406
49106	152 X 203	49116	381 X 457
49107	152 X 229	49117	381 X 457
49108	152 X 254	49118	457 X 508
49109	203 X 254	49119	457 X 610

Packaged 100 per package



Made in America

### TRANSPARENT STATIC DISSIPATIVE (PINK POLY)

# PROTEKTIVE PAK

PROTEKTIVE PAK  
 14040 CENTRAL AVENUE, CHINO, CA 91710  
 PHONE (909) 627-2578, FAX (909) 363-7331  
 www.protektivepak.com

**DRAWING NUMBER**  
 49100.E

**DATE:**  
 8/07