




Model 800i


Recirculating fume extraction is now extremely important with the rising concern for our environment and employee safety. Purex Fume Extractors provide not only a flexible and portable process for plant redesigns and expansions, but also a more stable process by providing a controlled airflow to remove harmful fumes. All this while eliminating the added costs of building modifications, increased air handling systems and lost energy.


Purex Digital Systems

- ❖ Automatic Flow Control maintains constant extraction rate
- ❖ Adjustable Air Flow extends filter life
- ❖ Blocked Filter Warning
- ❖ Easy to change filters
- ❖ Low energy consumption
- ❖ Quiet operation
- ❖ Welded stainless steel construction
- ❖ Reverse Air Flow prevents condensation and extends filter life
- ❖ Continuous run brushless motors
- ❖ HEPA filtration removes 99.997% of particles down to .3 microns
- ❖ Gas and particle sensors on exhaust
- ❖ Filter Blocked Monitor
- ❖ Gas Safety Sensor
- ❖ Particle Safety Sensor
- ❖ Motor Run Indicator
- ❖ Airflow reading
- ❖ Filtered air temperature
- ❖ Quick-read visual display
- ❖ Remote Machine Interface

800i Volume Control

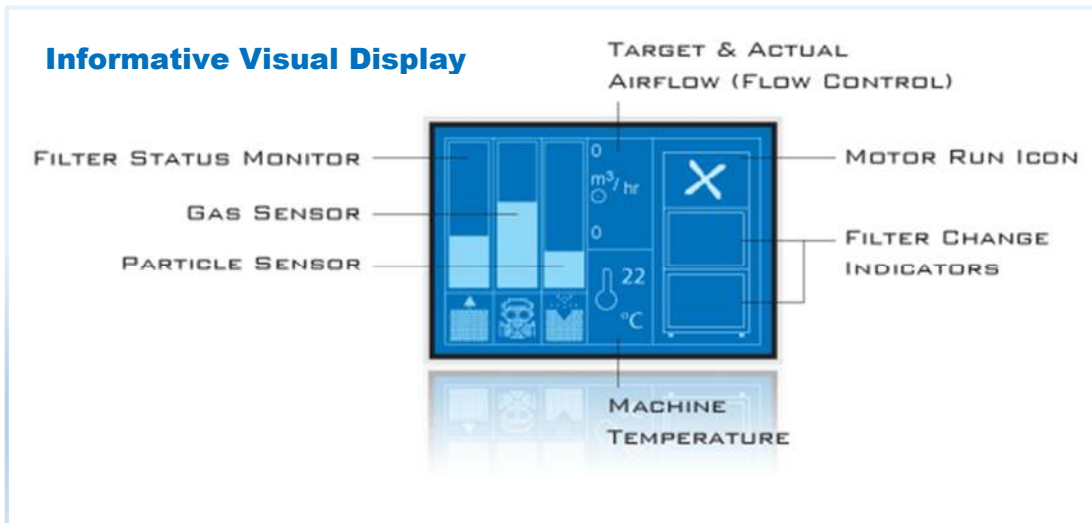

Main Filter Options		
	HEPA/Chemical	113652EB
	HEPA/Twin Chemical	113660EB
	HEPA Chemical Cleanroom*	113658EB
	HEPA	113650EB
	Chemical	113651EB
	Solvent Lock	113667EB
*Use F8/F9 Pre-filter		

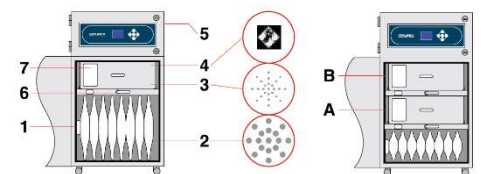


800i 2T

- 1) Air inlet
- 2) Pre-filter
- 3) Main filter (HEPA)
- 4) Main filter (Carbon)
- 5) Clean air return
- 6) Filter lock Handle
- 7) Filter I.D. label

800i 3T

- A.) HEPA
- B.) Chemical only

Labyrinth Pre-Filter Options		
	2T	
	F6 (std) 60-80% eff 1-3μ	202280EB
	F8/F9 Composite >95% eff .5-1 μ	202272EB
	3T	
	F8/F9 Composite >95% eff .5-1 μ	202273EB

	800i – 2 Tier		800i – 3 Tier	
	080503DEB	080502DEB	080500DEB	080501DEB
Model	080503DEB	080502DEB	080500DEB	080501DEB
Voltage (50hz/60Hz)	120v (1ph)	230v (1ph)	120v (1ph)	230v (1ph)
Wattage	2.74 kW	2.6 kW	2.74 kW	2.6 kW
Airflow	470 cfm (800 m ³ /Hr)			
Vacuum	40 inwg (9.92kPa)			
Air Inlet	3.94in (100mm) Safe Seal			
Sound Rating	65 dBA			
Dimensions (L/W/H)	22.5in x 26.5in x 44.5in			
Weight	176 lbs			