

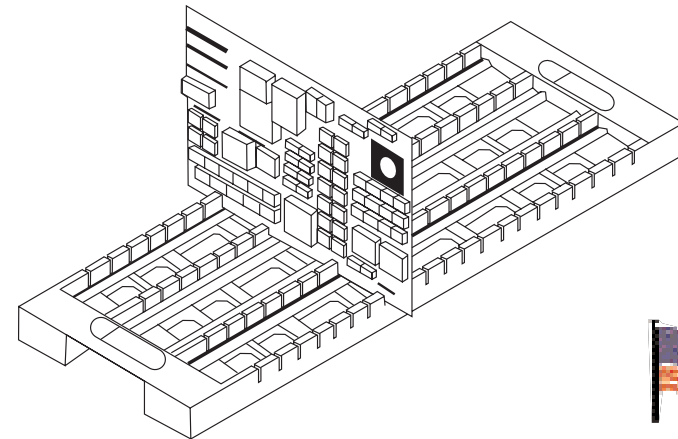


- A. This Charleswater PCB rack is moulded from a carbon black-filled polypropylene compound.
- B. These racks are designed to protect CMOS loaded boards in storage.
- C. Recommended maximum operating temperature is 85°C.
- D. Open carrying handles.
- E. Measurements: 175mm x 500mm.
- F. Weight: 0.7kg.
- G. 20 slots with easy-to-load angle: 3mm x 8mm on a 18.75mm pitch.
- H. Recyclable

“Tools intended for use within the EPA [ESD protected area] shall, as far as is practicable, be so constructed that they do not generate or hold an electrostatic charge ....All tools and machinery, for example electrical, mechanical or pneumatic, shall be so constructed that any non-insulating part of the tool or machine which may touch an ESDS [ESD sensitive items] shall be at EPA ground potential.” [EN 61340-5-1 clause 5.2.10 Tools, machinery, dispensers and test equipment]

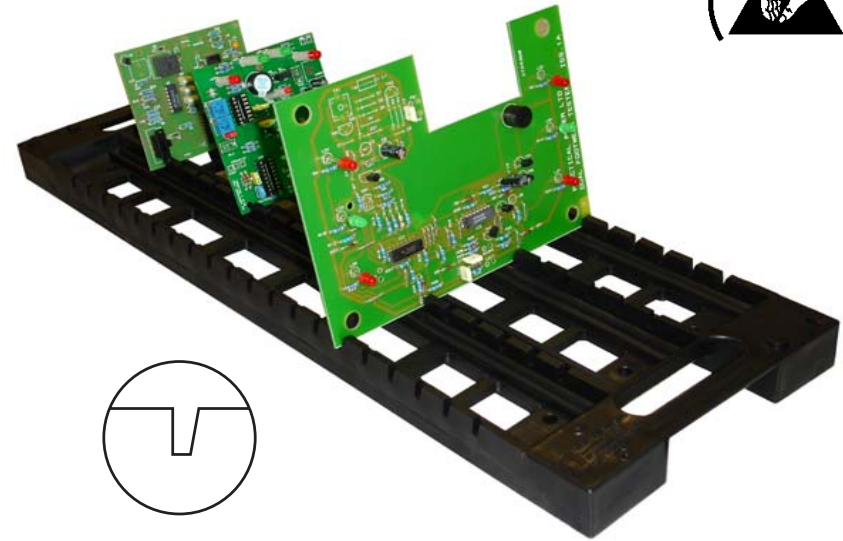

Made in America

Properties		UNIT	TEST METHOD
<b>Electrical Properties</b>			
Surface Resistance	<10E6	Ohms/square	ASTM D-257
Volume Resistance	<10E6	Ohms-cm	ASTM D-257
<b>Mechanical Properties</b>			
Tensile Strength @ Break	2860 (19.7)	psi (MPa)	ASTM D-638
Tensile Elongation @ Break	2.5	%	ASTM D-638

ITEM	DESCRIPTION
91500	Conductive PCB Rack, 175mm x 500mm



### Conductive PCB Rack, 175mm x 500mm

Charleswater, Unit 17, Millbrook Business Park, Sybron Way, Crowborough, East Sussex, TN6 3JZ, United Kingdom  
 Phone: +44 (0) 189 266 5313, Fax: +44 (0) 189 266 8838,  
 Email: service@charleswater.co.uk , Website: Charleswater.co.uk

Drawing Number  
91500.E

DATE:  
February 2009