




BURIED METAL, METAL IN CONSTRUCTION

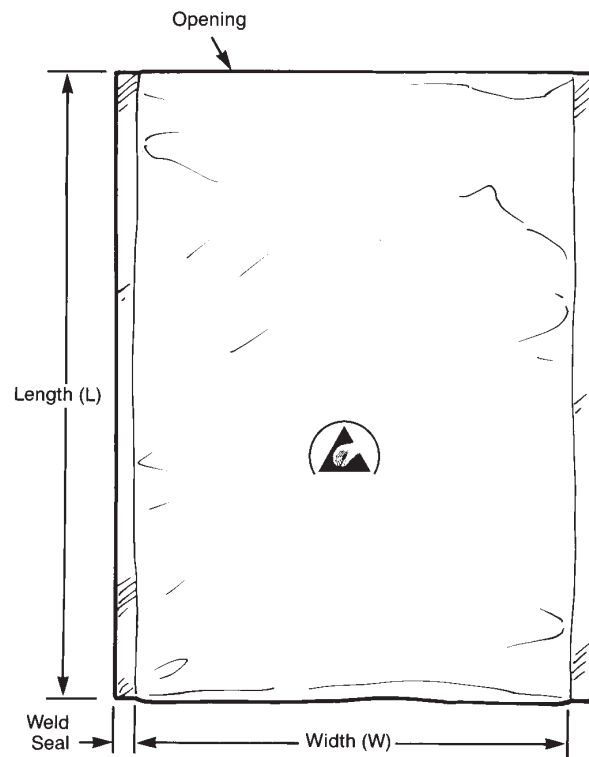

Specifications:

Electrical Properties

Surface Resistance:

Outer Surface

Inner Surface

Static Shielding

Typical Values

< 1 x 10¹¹ ohms

< 1 x 10¹¹ ohms

<25 nJ

Test Procedures/Method

ANSI/ESD STM11.11

ANSI/ESD STM11.11

ANSI/ESD STM11.31

Physical Properties

Bag Thickness:

Total Thickness

Nominal .0030" (.0762mm) ±10%

ASTM D-2103

Side Weld Seals 3/8 in.

Specifications and procedures subject to change without notice.

***Film made in USA or Malaysia**



Made in United States of America*

BAG, SHIELDING, BURIED METAL, METAL IN CONSTRUCTION

CMG

3651 Walnut Avenue, Chino, CA 91710
PHONE: (909) 627-9634 FAX: (909) 363-7322
WEB: CMG-Sales.com

DRAWING NUMBER
Nostat Metal In Bag

DATE
April 2012