

ESD Lab Coats Instructions for Use



Made in the
United States of America



Figure 1. Vermason Female ESD Lab Coat



Figure 2. Vermason Male ESD Lab Coat

Vermason ESD Lab Coats meet the required limit Rp-p less than $1 \times 10E12$ ohms in EN 61340-5-1 tested per ANSI/ESD STM2.1 as noted in Table 3 EPA requirement of EN 61340-5-1 Edition 1.0 2007-08.

“The ESD risk provided by everyday clothing cannot be easily assessed. The current general view of experts is that the main source of ESD risk may occur where ESDS [ESD sensitive items] can reach high induced voltage due to external fields from the clothing, and subsequently experience a field induced CDM [Charged Device Model] type discharge. So ESD control garments may be of particular benefit where larger ESDS having low CDM withstand voltage are handled, and operators habitually wear everyday clothing that could generate electrostatic high fields.” [CLC TR 61340-5-2 2008 User guide Garments sub-clause 4.7.7.1 Introductory remarks]

Main features:

- 2 side pockets and 1 breast pocket
- Available in two models: for both men and women

- International ESD symbol on breast pocket
- Quick opening and closing snap
- Lightweight, comfortable and breathable material
- Composition: Cotton, Polyester and conductive fibres
- Tough and durable
- Optimized width of conductive grid
- Machine washable (40°C); resistant to repeat washing cycles
- Coats are CE certified
- Standard colour: white
- Custom colours available
- Company logo (embroidered or printed) available on request

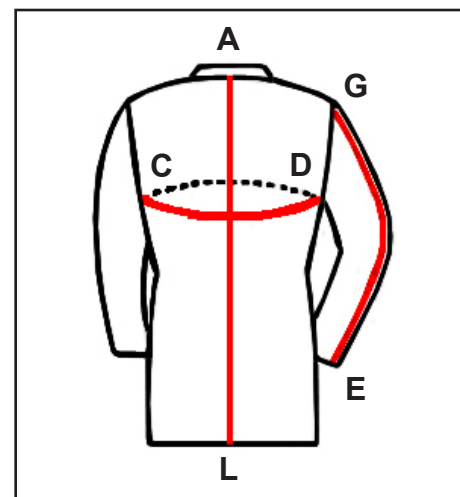


Figure 3. Guide for measurements

Sizes and Measurements

Model	Size	Chest	Shoulders	C-D	A-L	G-E	Ø Wrist
Women	X-Small	40	40	102	98	58	15
Women	Small	44	42	108	100	59	15.5
Women	Medium	48	44	114	102	60	16
Women	Large	52	46	120	104	61	16.5
Women	X-Large	56	48	126	106	62	17
Men	Small	42-44	48	116	88	60	16.5
Men	Medium	46-48	50	122	92	61	17
Men	Large	50-52	52	128	96	62	17.5
Men	X-Large	54-56	54	134	100	63	18
Men	2X-Large	58-60	56	140	104	64	18.5

Please note that measurements are in cm and are an indication only. Measurements equal average sizes and can be subject to change without notice.

Description

Comfortable ESD dissipative lab coats are ideal for any production environment in which sensitive items (ESDS) are being handled. The coats offer ESD protection using the principle of the Faraday cage shielding ESDS from electrostatic charges on operator's clothing. The buttons at the front have an overlap which avoids direct contact with parts.

Women's Model:

Item	Description
221320	Women White Lab Coat, X-Small
221321	Women White Lab Coat, Small
221322	Women White Lab Coat, Medium
221323	Women White Lab Coat, Large
221324	Women White Lab Coat, X-Large

Men's Model:

Item	Description
221325	Men White Lab Coat, Small
221326	Men White Lab Coat, Medium
221327	Men White Lab Coat, Large
221328	Men White Lab Coat, X-Large
221329	Men White Lab Coat, 2X-Large

Technical Properties:

Composition (nominal)	
Cotton	37.4%
Polyester	60.2%
Conductive Fibres	2.4%
Weight	146 g/m ²
Washing Instructions	
Washing	Machine washable up to 40°C
Ironing	Ironing temperature up to 150°C
Bleaching	Do not bleach
Dry cleaning	Dry clean (normal treatment)
Tumble Drying	Low drying temperature
Surface Resistivity	
Test Voltage	100V
Surface Resistance R _S	< 5 x 10E10 ohms

Limited Warranty

Vermason expressly warrants that for a period of one (1) year from the date of purchase, Vermason ESD Lab Coats will be free of defects in material (parts) and workmanship (labour). Within the warranty period, a unit will be tested, repaired or replaced at Vermason's option, free of charge. Call Customer Service at 0044 (0) 1462 672005 for a Return Material Authorisation (RMA) and for proper shipping instructions and address. Any unit under warranty should be shipped prepaid to the Vermason factory. You should include a copy of your original packing slip, invoice, or other proof of purchase date. Warranty repairs will take approximately two weeks.

If your unit is out of warranty, Vermason will quote repair charges necessary to bring your unit to factory standards. Call Customer Service at 0044 (0) 1462 672005 for a Return Material Authorisation (RMA) and proper shipping instructions and address.

Warranty Exclusions

THE FOREGOING EXPRESS WARRANTY IS MADE IN LIEU OF ALL OTHER PRODUCT WARRANTIES, EXPRESSED AND IMPLIED, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE WHICH ARE SPECIFICALLY DISCLAIMED. The express warranty will not apply to defects or damage due to accidents, neglect, misuse, alterations, operator error, or failure to properly maintain, clean or repair products.

Limit of liability

In no event will Vermason or any seller be responsible or liable for any injury, loss or damage, direct or consequential, arising out of the use of or the inability to use the product. Before using, users shall determine the suitability of the product for their intended use, and users assume all risk and liability whatsoever in connection therewith.