


Key:

- A. 10mm (0.395 in.) male snap to ground mats.
- B. Molded in green and yellow thermoplastic elastomer.
- C. High flex strand copper, 20 gauge, with PVC insulated jacket. Green insulation with yellow stripe. OD = 0.107"
- D. Barrel type banana plug. Crimped uniformly from 4 sides for maximum strength. Fits industry standard banana jack 0.166" (4.2mm).
- E. Brass crimp secures conductors and provides stress relief.
- F. ESD Systems logo molded onto cap on top of shroud.
- G. Date coded to show month and year of manufacture.
- H. 6-32 x 1/4" flat head screw and countersunk washer allow floor mat ground to be bolted to mat.

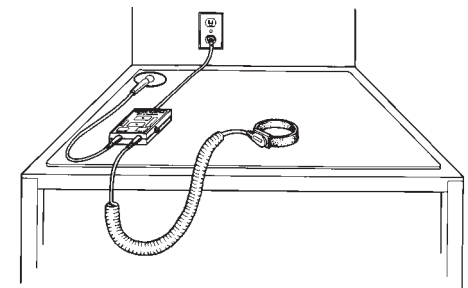

Item 13258 grounds worksurface mat to your 41116 Continuous Monitors.

Ground Cord, Threaded 10mm Snap Stud, Banana Plug

