

Description:

This Disposable Heel Grounder is ideal for flooring/footwear personnel grounding of visitors in ESD protected areas. The black conductive strip is bordered by bright yellow colour material providing excellent visibility, assisting in enforcing an ESD control programme. The conductive non-woven nylon strip is held to the heel of the shoe by pressure sensitive adhesive.

To Attach:

1. Strip release paper from pressure sensitive adhesive.
2. Insert the non-adhesive end of the disposable heel grounder inside the shoe under the foot so that the black dot is in the center of the heel area, facing upwards.
3. Wrap the tape snugly around the outside of the shoe so that the adhesive area adheres to the underside of the heel of the shoe.
4. Step firmly onto pressure-sensitive adhesive and tear off excess material at serration.
5. Check for proper ground connection with the Vermason Dual Independent Footwear and Wrist Strap Tester or other tester.
6. One heel grounder should be used on each foot.


Electrical Performance:

The tab to cup resistance is 5×10^4 to 8×10^5 ohms per IEC 61340-5-1 Clause A.2.

ITEM NO.	DESCRIPTION	LENGTH	UNIT
249200	Disposable Heel Grounder	298mm	50
249205	Disposable Heel Grounder	298mm	100

Caution: The heelgrounder is for ESD control. It will not reduce or increase your risk of receiving electric shock when using or working on electrical equipment.

Material:	Yellow non-woven fibrous material
Conductor:	Carbon black
Width:	14mm
Electrical Resistance Rp (end-to-end):	5×10^4 to 8×10^5 ohms

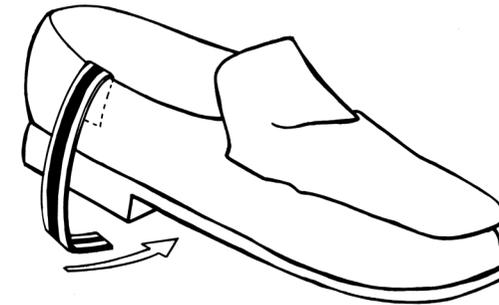

Note:

"Alternative grounding method is through the foot and footwear to ESD control flooring or mats. There are a wide variety of footwear grounding devices available." [CLC/TR 61340-5-2:2008 User guide clause 4.7.4 Footwear]

"Heel and toe grounders should be worn on each foot. If worn improperly, heel and toe grounders become ineffective. ... It is important that the conductive ribbon has good electrical contact with the person's skin or by connection through the person's socks." [CLC/TR 61340-5-2:2008 User guide Footwear clause 4.7.4.2.1 Heel and toe grounders]

Vermason recommends the use of [222611](#) foot ground tester. Download Technical Bulletin [TB-7533](#).

Disposable Heel Grounder Dispenser

Designed to be mounted on a wall. Printed with instructions for use of Disposable Heel Grounder. Treated with antistatic coating.

Size: 315 x 200 x 55mm, tray is 105mm deep

[249220](#) - Tray, wall mounted



Specifications and procedures subject to change without notice.

Vermason

Disposable Heel Grounder

VERMASON
UNIT C, 4TH DIMENSION, FOURTH AVENUE, LETCHWORTH,
HERTS, SG6 2TD UK
PHONE: +44 (0) 1462-672005, FAX: +44 (0) 1462-670440
E-MAIL: Service@Vermason.co.uk, INTERNET: Vermason.co.uk

Drawing Number
249200

DATE:
September
2012