


Side View

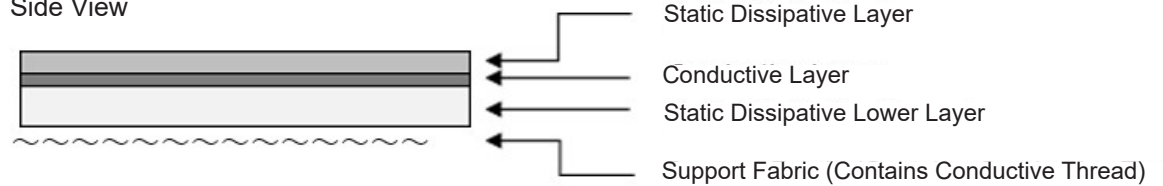

Grounding:

This material must be properly grounded for optimum electrical performance. See item [81524](#).

Electrical Properties:

Item	Specification	Unit	Testing Method
Surface of color layer	RTG: 1×10^6 to $< 1 \times 10^9$	Ohms	ANSI/ESD STM7.1
Conductive black layer	RTG: $< 1 \times 10^6$	Ohms	ANSI/ESD STM7.1

Coated PVC Dissipative Runner

Item	Color	Width	Length
9602D	Beige	1820mm	9m
9609D	Green	1820mm	9m

Matting materials have a tendency to shrink slightly when first unrolled. In applications where length is critical, allow the material to relax for at least 4 hours before cutting to size. Carefully trim with a sharp knife or razor blade.

Physical Properties:

Item	Specification	Unit	Testing Method
Thickness	2.0	mm	JIS A 1454
Indentation (23°C - 45°C)	0.3~1.5	mm	JIS A 1454 (Method A)
Residual Indentation	<0.75	mm	JIS A 1454 (Method A)
Rate of Thermal Expansion	>-2.00 to <2.00	%	JIS A 1454 (Measurement Instruments A)
Surface Resistance	$< 1.0 \times 10^7$	Ohm	JIS K 6911
Resistance through the Thickness	$< 1.0 \times 10^7$	Ohm	JIS K 6911

Made in Japan

Color and texture may vary between lots and mills
 Specifications and procedures subject to change without notice.

9600D Series Dissipative PVC Flooring Sheet

193-12 Yachimata-i,
 Yachimata-shi, Chiba, 289-1143, Japan
 PHONE: 81-43-309-4470
 WEBSITE: DescoAsia.com

Drawing Number
 9602D

DATE:
 September 2023

DESCO ASIA