

A Donaldson Company

A WORLD LEADER IN FUME **EXTRACTION TECHNOLOGY** 



**ELECTRONICS, PHARMACEUTICAL & MEDICAL** 





The complete solution for fume cabinet extraction for various applications

Partial enclosures are steadily becoming the preferred option for operator protection from fumes generated from processes such as hand soldering, solvent use, and other processes that produce harmful fumes.

This cabinet has been designed to work with the V250 extraction system.

#### Technology



**ProTECT** service plan



SureCHECK quality standard

#### Key features of the FumeCAB 250

LED strip light Standard

Strong rigid Standard

V 250 filtration unit Optional

Powder coated white Standard

1 x 1.5 meters of 75mm flexible hose Standard

Contact BOFA at https://bofainternational.com/en/contact/

https://bofainternational.com/us/portal/datasheets/fumecab-250/














# **Technical specifications**



# Airflow through filters



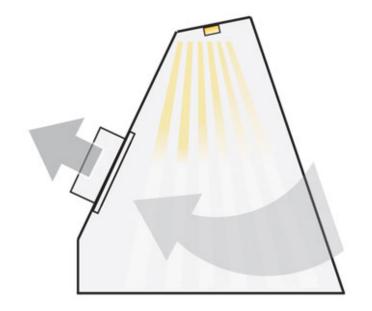

| Technical data             |                   |                        |
|----------------------------|-------------------|------------------------|
|                            | EU                | US                     |
| Dimensions (HxWxD)         | 290 x 400 x 300mm | 11.42 × 15.75 × 11.81" |
| Opening dimensions (HxWxD) | 265 x 400mm       | 10.4 x 15.7"           |
| Recommended face velocity  | 0.5m/s            | 118 f/min              |

| Technical data - V 250 extraction system |                          |                          |  |
|--|--------------------------|--------------------------|--|
|  | EU                       | US                       |  |
| Dimensions (HxWxD)                       | 430 x 290 x 290mm        | 16.93 x 11.42 x 11.42"   |  |
| Cabinet construction                     | Powder coated mild steel | Powder coated mild steel |  |

| Technical data - V 250 extraction system |  |  |  |
|--|--|--|--|
| Airflow / Pressure                       | 180m³/hr / 30mbar                                      | 106cfm / 30mbar                                    |  |
| Electrical data                          | 230v 1ph 50/60Hz Full load current: 0.9<br>amps / 135w | 115v 60/50Hz Full load current: 1.2 amps /<br>135w |  |
| Noise level                              | < 55dBA (at typical operating speed)                   | < 55dBA (at typical operating speed)               |  |
| Weight                                   | 10kg   | 22lbs  |  |
| Duct size                                | 50mm   | 2"   |  |
| Max duct run                             | 5 mtrs   | 16.4ft   |  |
| Approvals                                | CE   | CE   |  |

| V 250 pre-filter specifications |                      |  |
|---------------------------------|----------------------|--|
| Filter media                    | Borosilicate         |  |
| Filter media construction       | Pad                  |  |
| Filter efficiency               | F7 (96% @ 2 microns) |  |

| V 250 combined filter specifications |                                |  |
|--------------------------------------|--------------------------------|--|
| HEPA filter media                    | Borosilicate                   |  |
| HEPA media construction              | Pleated with glue bead spacers |  |
| Gas filter                           | Treated activated carbon       |  |
| Filter housing                       | Zintec mild steel              |  |
| Treated activated carbon             | 2kgs (4.4 lbs)                 |  |
| Filter efficiency                    | 99.997% @ 0.3 microns          |  |

| Part numbers   |            |                         |
|--|------------|-------------------------|
| Model  | Part no.   | Optional VOC monitoring |
| FumeCAB 250  | A1020127   | N/A                     |
| FumeCAB 250 and V 250 fitted with combined HEPA/Gas filter | E0842A0006 | A2003                   |
| FumeCAB 250 and V 250 fitted with double gas filter        | E0842A0007 | A2003                   |

### Other languages

FumeCAB 250 French FumeCAB 250 <u>Italian</u>

Datasheet correct at time of publishing.

Where applicable, the carbon used in BOFA units is capable of removing a wide range of VOC's, however it is the responsibility of the user to ensure the carbon is suitable for their application. For specific applications, please contact us for details.

Think before you print! Please consider the environment before printing this document.